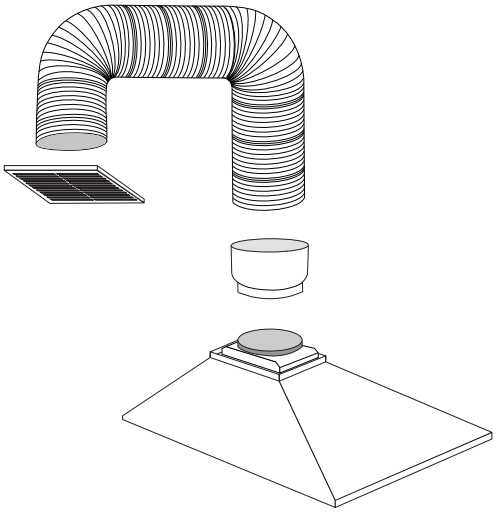

EAVE DUCTING KIT

instruction manual
VDKE

12 MONTH WARRANTY

Contents

Guide to the Ducting Kit	2
Caring for the Environment	3
Safety Information and Warnings	4 - 5
Items in the Box	6
Installation Instructions	7

Guide to the Ducting Kit

VDKE

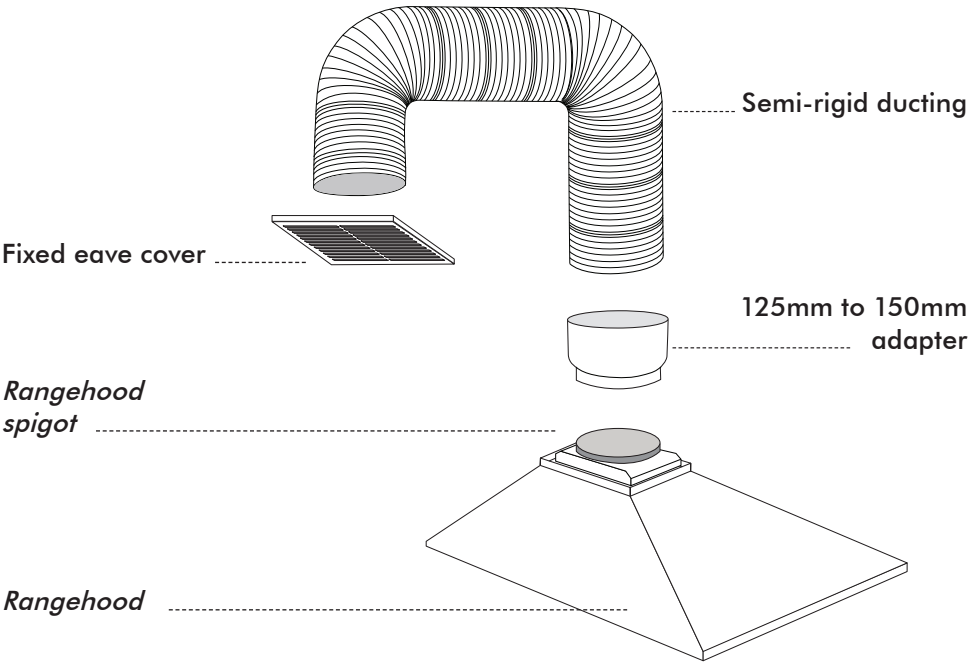

Note:

Due to production improvements, the ducting kit may differ slightly from the diagram shown. Diagrams in this instruction manual are for reference only

Caring for the Environment

Responsible disposal of the packaging

The packaging of your ducting kit has been selected from environmentally friendly materials and can usually be recycled. Please ensure these are disposed of correctly.

Plastic wrapping can be a suffocation hazard for babies and young children, please ensure all packaging materials are out of reach and are safely disposed of. Please ensure they are offered for recycling rather than throwing these materials away.

Safety Information and Warnings

General

- Please ensure this manual is read carefully before installation and use. Keep this manual in a safe and accessible location should future reference be required.
- The ducting has been designed as an exhausting version (external exhaust) of your cooker hood.

Installation Safety Precautions

- Appropriate safety wear and shoes should be worn for installation.
- Safety harness equipment is recommended if working on a roof or a high ladder.
- Installation by a professional recommended.

WARNINGS

- Regular maintenance should be made to check the status of the filters of your cooker hood.
- Naked Flame cooking (flambe) is prohibited underneath cooker hood (e.g. items such as BBQ's).
- The ducting kit should only be installed in a domestic situation.
- Constantly check frying food to avoid it becoming overheated as the oil may become a fire hazard.
- Young children should be supervised to ensure that they do not play with the appliance.
- Avoid bends wherever possible along ducting. Efficiency will be reduced.
- Never decrease ducting size along ducting length.
- Avoid long runs of ducting.
- No joins should have gaps.

Items in the Box

1. 1 x 3000mm / 150mm diameter, flexible semi rigid ducting pipe
2. 1 x Fixed eave cover
3. 1 x 125mm to 150mm duct adapter where spigot size is 120mm in diameter
4. 4 x Anchor plugs
5. 4 x 30mm screws to fit fixed eave cover
6. 1 x 48mm wide ducting tape - to secure flexible semi-rigid ducting pipe to spigot and / or adapter and Louvre cover

Installation Instructions

Eave Mount Installation:

1. Following installation of rangehood ensure correct positioning of the kit components, refer to above illustration. All kit components need to installed securely to reduce noise levels andensure optimum air flow. No gaps should be present that may effect flow of air through the ducting pipe. Holes made to house ducting pipe through cupboards, eaves and ceiling should be sealed to stop dust or insects entering the house from the exterior of the house.
2. Extend semi-rigid ducting pipe fully and cut the length required to fit to the fixed eave cover and top of rangehood spigot or adapter, if utilsed for use with rangehoods with a 120mm spigot. Secure both ends of the semi-rigid ducting pipe with the ducting tape supplied. It is recommended to fit the semi-rigid ducting pipe to the fixed eave cover first and secure with ducting tape then feed semi-rigid ducting pipe to inside from the exterior. Fit fixed eave cover to the outside with anchor plugs and screws supplied. Depending on the eave type, different anchor plugs may be required. Add a bead of silicon around the edge of the fixed eave louvre cover to ensure a water tight seal. Bend and extend the semi-rigid ducting pipe as much as possible to ensure smooth air flow through ducting pipe. Secure the semi-rigid ducting pipe to top of the rangehood spigot or adapter with the ducting tape. Try to ensure the bends in the semi-rigid ducting pipe do not have acute angles present as this will restrict air flow that will also create higher noise levels during operation.
3. If rangehood is a canopy type, fit decorative flue covers in place following installation of ducting.

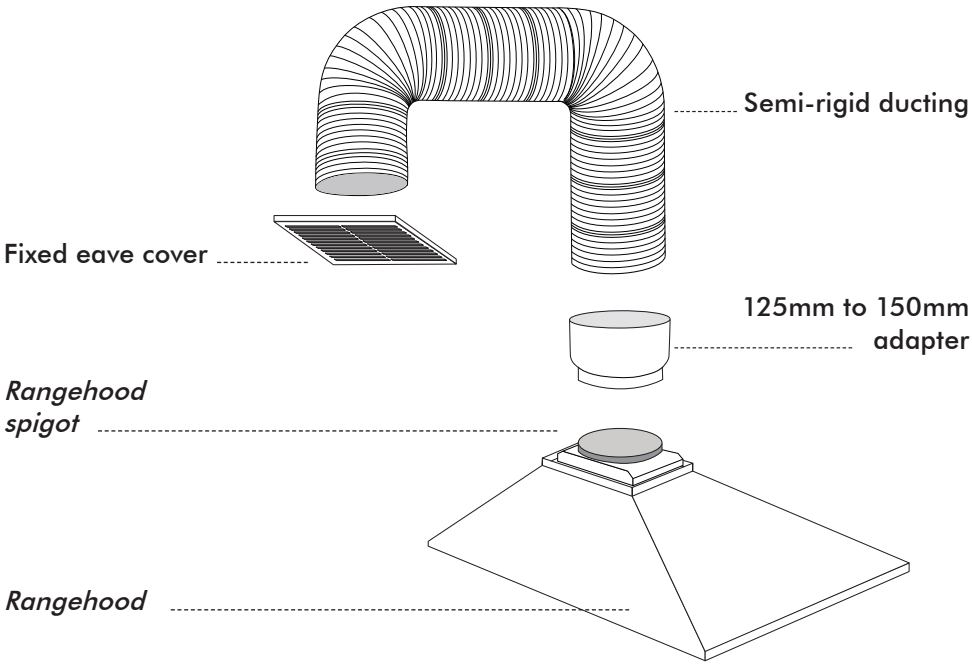
Semi-rigid ducting
Fixed eave cover
125mm to 150mm
adapter
Rangehood
spigot
Rangehood

Blank Page

Blank Page

Distributed by:
Home Appliances Pty. Ltd.
20 Carlotta Street, Artarmon NSW 2064
After sales support: 1800 444 357
Fax: 1300 133 279
Email: info@hapl.com.au

VIALIPRODUCTS.COM.AU

While every effort has been made in the preparation of this instruction manual, the publishers cannot be held responsible for the accuracy of the information contained herein or any consequences arising from it.